



New for 2021

Index

Page no 2 - 150mm(6") Inspection access cover with seal




Page no 3 - Titanium Thimbles

Page no 4 - Screw-on stopper balls


Page no 5 - Mast guyline tensioning reel

150mm (6") Inspection Access Cover with seal


- Available in Black and White
- Ribbed deck ring to maximise seal to deck
- Winch handle socket open/close version available
- Generous finger recess open/close version available
- 6 x 4mm invisible fastening holes (slots) for smooth lines
- EPDM UV resistant "O" ring seal
- Material = ASA Polymer
- Acetone resistant



6 x 4mm pan head bolts or screws

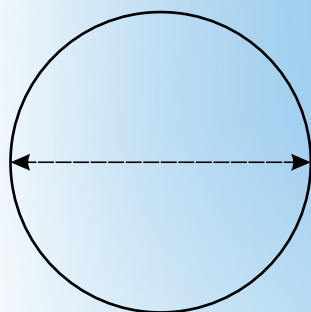

Overall dia 206mm

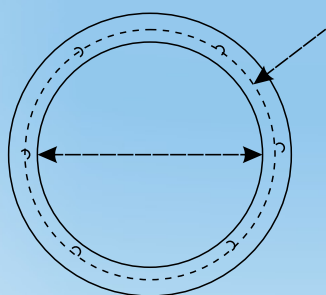

Internal dia 150mm

PCD = 182.5 to 185.5mm slots



Cutting dia 165mm



Part Number	Colour	Type
DH6NB	Black	Finger Tighten
DH6NW	White	Finger Tighten
DH6W	White	Winch Handle Socket

Titanium Thimbles

 Light weight & very strong


 Abrasion resistant

 Corrosion proof

A range of 4 circular solid titanium thimbles.

Ideal for high load racing applications.

Use with all types of fibre or steel wire ropes

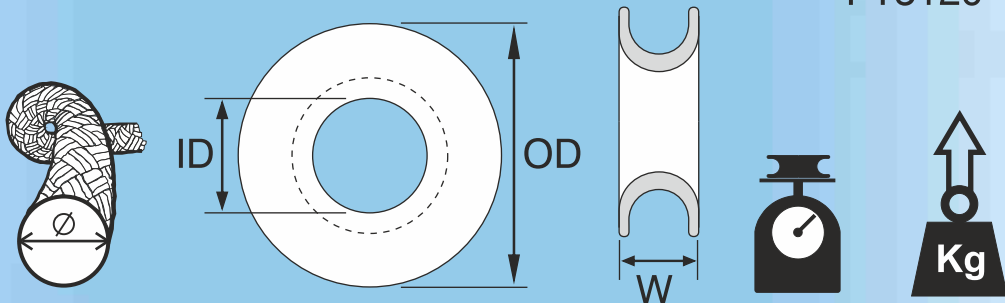

	Rope size	Inside diameter	Outside diameter	Width	Weight	S.W.L.
PT5107	3-4mm	7mm	16mm	6mm	2gm	400kg
PT5110	5-6mm	10mm	23mm	8mm	4.5gm	800kg
PT5115	7-8mm	15mm	34mm	11mm	14gm	1500kg
PT5120	12-13mm	20mm	45mm	18mm	32gm	3000kg

Other sizes available to special order - email us your enquiry.

CL51xx/R
are packed on
a blue card with
rigging suggestions



CL51xx/L
are packed in
polybags of 10



PT524 & PT525

Screw-on stopper ball for use with 6 & 8-9mm rope and tube

- Use 3mm Allen key to fix in position.
- Ideal for use on kite surfing brake line, outhauls, vang and pole
- deployment systems on dinghies and sports boats. Will not damage the rope.

PT524



6mm \varnothing
1/4" \varnothing



12gms
0.4 ozs





PT525



8 - 9mm \varnothing
5/16"-3/8" \varnothing

Fit a stopper ball on Kitesurf brake lines to stop the bar hitting the cleat base and causing damage.

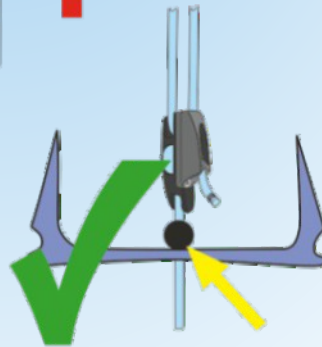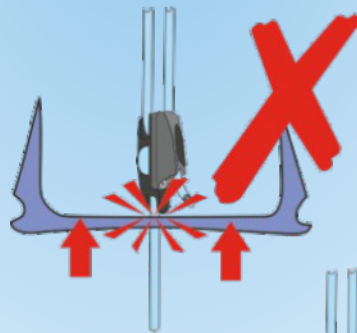

Mast guyline tensioning reel


Allows guylines on larger portable masts to be quickly and easily tensioned and released.

PT300771 is impact resistant in sub-zero conditions.




Cleat automatically grips the rope when tensioning.

Can be used when wearing thick gloves.

Corrosion proof, weather proof.



Tariff No 3926 90 97
Made in UK

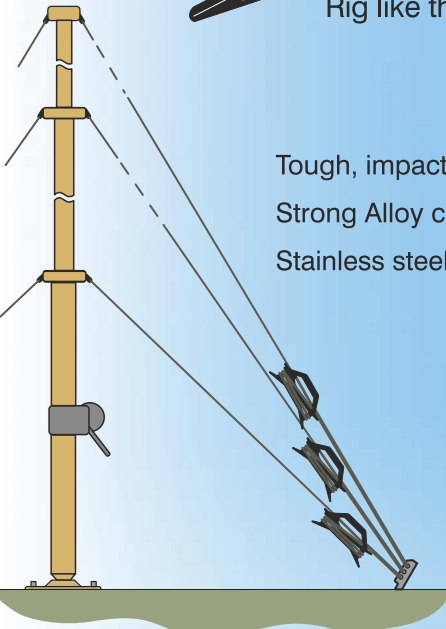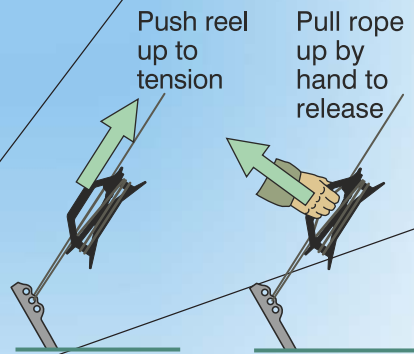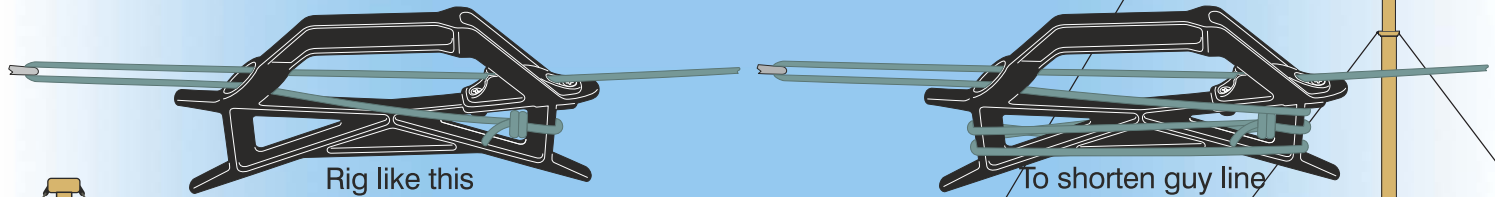

Leaflet No LL00139